
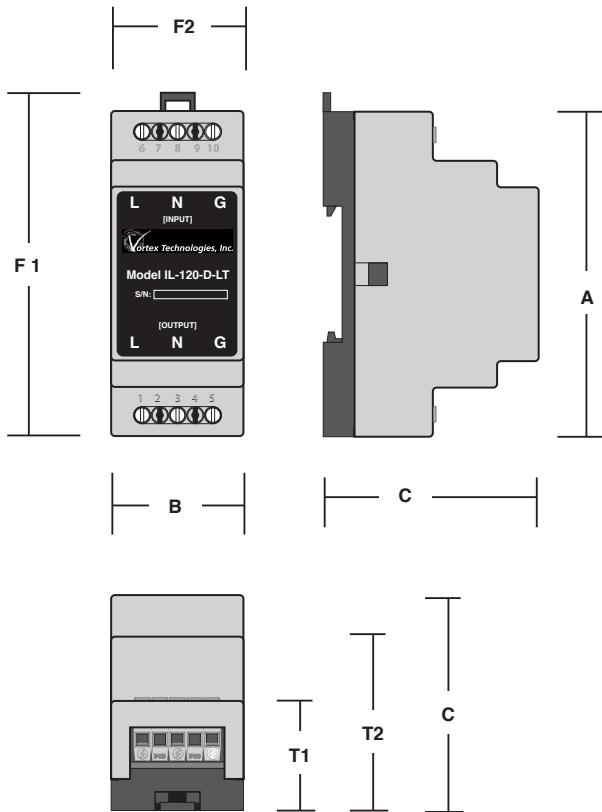


Iso-Line

120/220 V.A.C. Surge Suppressor

- Models available for 120 and 220 V.A.C. applications
- Maximum continuous current 20 amps
- Surge suppression 13,000 amps
- Standard DIN-RAIL 35mm mount
- Cost effective insurance against equipment damage

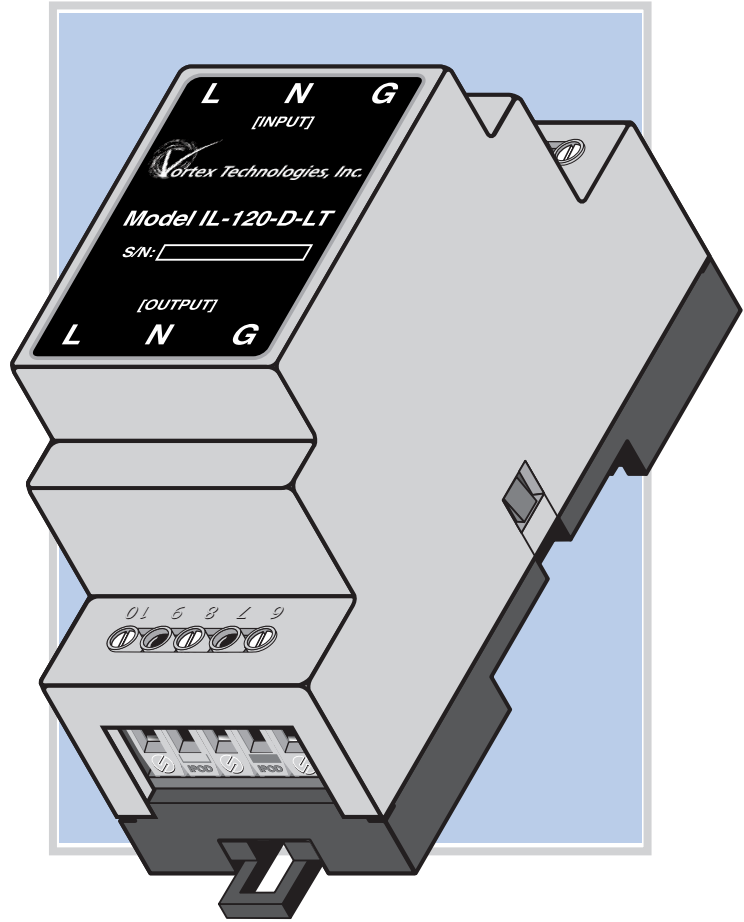

Model #	IL-120-D-LT	IL-220-D-LT
Length A	3.38 in. 86 mm.	3.38 in. 86 mm.
Width B	1.37 in. 35 mm.	1.37 in. 35 mm.
Height C	2.28 in. 58 mm.	2.28 in. 58 mm.
Tier Depth	T1 1.14 in. 29 mm.	T1 1.14 in. 29 mm.
	T2 1.88 in. 48 mm.	T2 1.88 in. 48 mm.
Mtg. Flange Length F1	F1 3.50 in. 89 mm	F1 3.50 in. 89 mm
Mtg. Flange Width F2	F2 1.37 in. 35 mm.	F2 1.37 in. 35 mm.