
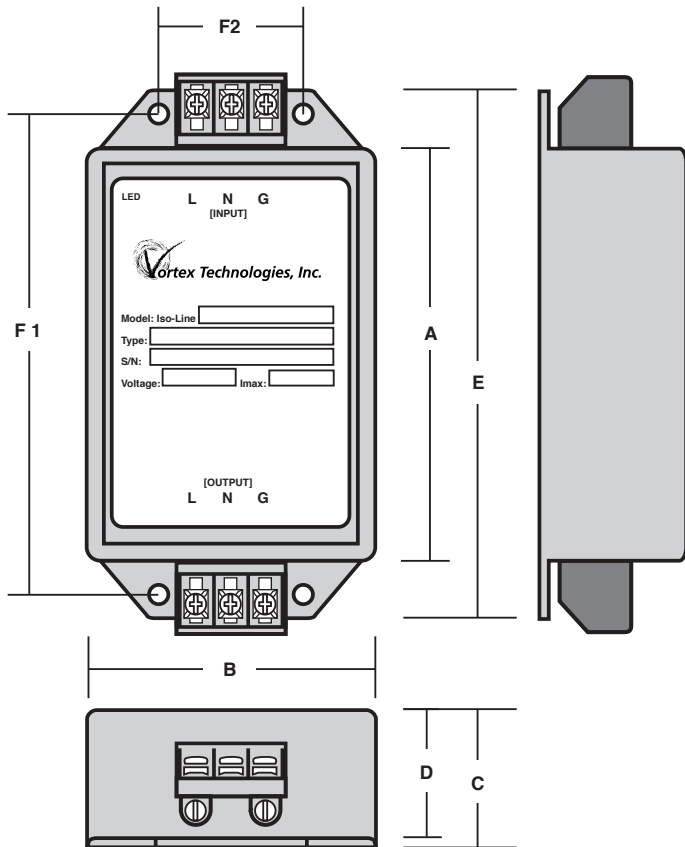


Iso-Line

120/220 V.A.C. Surge Suppressor, EMI/RFI Filter and Power Conditioner

- Models available for 120 and 220 V.A.C. applications
- Maximum continuous current 3, 10 and 20 by model selected
- Surge suppression 60,000 amps
- EMI/RFI Filtering from 0.1 HZ to 100 MHz
- Power conditioning maintains clean power +/- 15% of nominal power input
- Cost effective insurance against equipment damage

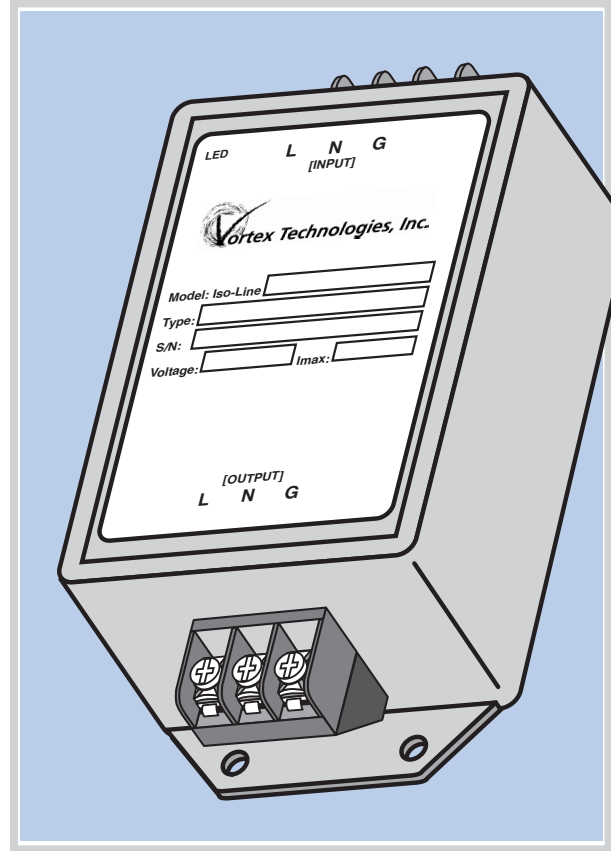

Model #	IL-120/220-3	IL-120/220-10	IL-120/220-20
Length A	6.125 in. 15.56 cm.	6.125 in. 15.56 cm.	6.125 in. 15.56 cm.
Width B	4.620 in. 11.73 cm.	4.620 in. 11.73 cm.	4.620 in. 11.73 cm.
Height C	2.255 in. 5.73 cm.	2.255 in. 5.73 cm.	2.255 in. 5.73 cm.
Inside Depth D	2.155 in. 5.47 cm.	2.155 in. 5.47 cm.	2.155 in. 5.47 cm.
Mtg. Flange Length E	7.285 in. 18.50 cm.	7.285 in. 18.50 cm.	7.285 in. 18.50 cm.
Mtg. Flange Holes F1 x F2	F1 6.750 in. 17.15 cm. F2 3.50 in. 8.89 cm.	F1 6.750 in. 17.15 cm. F2 3.50 in. 8.89 cm.	F1 6.750 in. 17.15 cm. F2 3.50 in. 8.89 cm.