
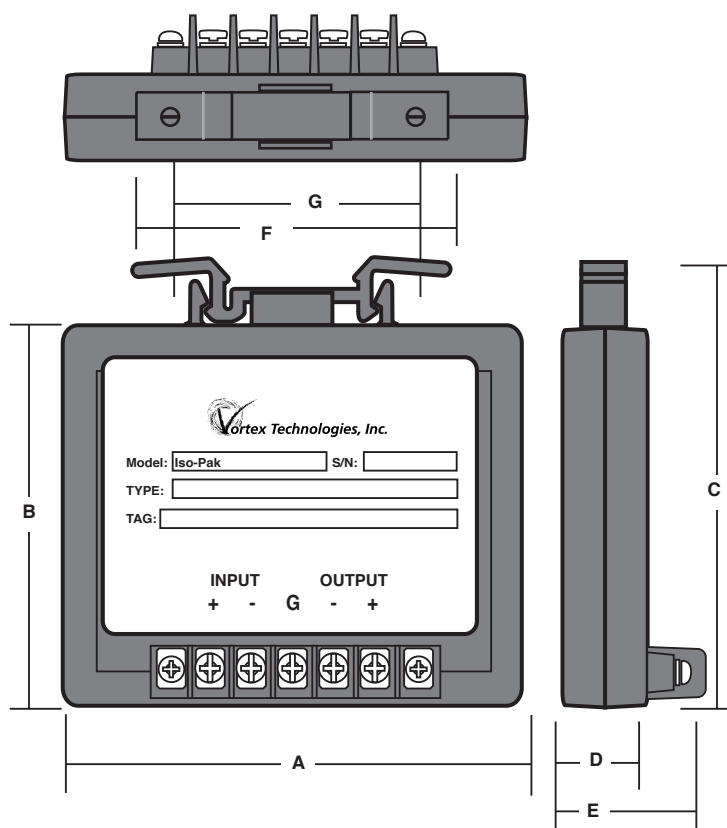


Iso-Pak

Control Loop Surge Suppressor, EMI/RFI Filter Din Rail Package

- Control loop Surge suppression and EM/RFI Filtering
- Modular design allows user to select desired features to best address the application
- Convenient DIN Rail mount package, bracket supplied
- Designed for use with any 2 wire control loop (voltage, current, frequency)
- Passive circuit design does not effect signals
- No calibration is required.
- Multistage surge suppression to 20,000 amps
- EM/RFI Filtering from 0.1 Hz to 50 MHz

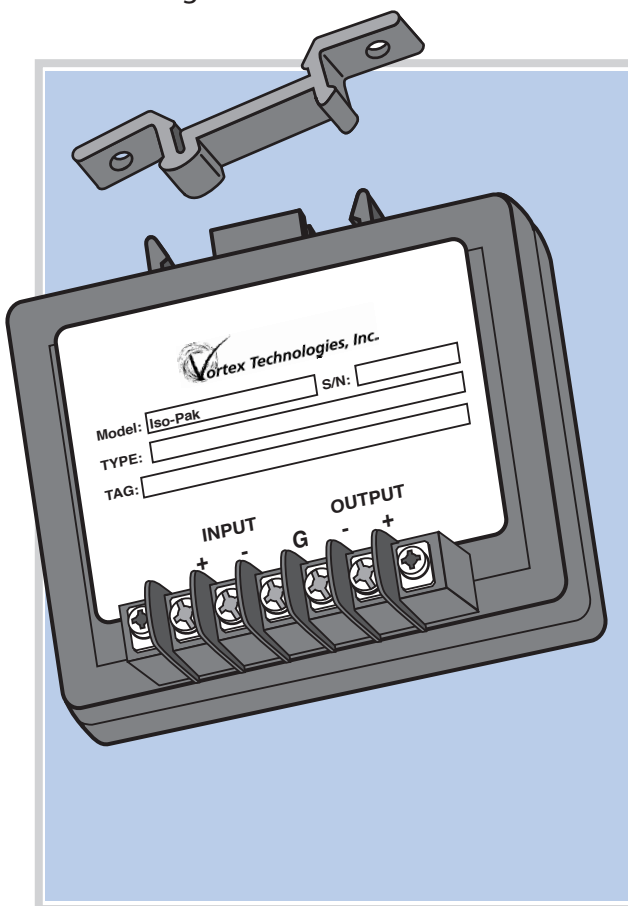

Model #	IP-130-D	IP-140-D	IP-220-D	IP-240-D
Length A	4.50 in. 11.43 cm.	4.50 in. 11.43 cm.	4.50 in. 11.43 cm.	4.50 in. 11.43 cm.
Width B	3.50 in. 8.89 cm.	3.50 in. 8.89 cm.	3.50 in. 8.89 cm.	3.50 in. 8.89 cm.
Over-all Width C	4.10 in. 10.41 cm.	4.10 in. 10.41 cm.	4.10 in. 10.41 cm.	4.10 in. 10.41 cm.
Inside Depth D	1.25 in. 3.175 cm.	1.25 in. 3.175 cm.	1.25 in. 3.175 cm.	1.25 in. 3.175 cm.
Depth E	1.9375 in. 4.921 cm.	1.9375 in. 4.921 cm.	1.9375 in. 4.921 cm.	1.9375 in. 4.921 cm.
Mtg. Flange Length F	3.125 in. 7.937 cm.	3.125 in. 7.937 cm.	3.125 in. 7.937 cm.	3.125 in. 7.937 cm.
Mtg. Flange Holes G	2.531 in. 6.428 cm.	2.531 in. 6.428 cm.	2.531 in. 6.428 cm.	2.531 in. 6.428 cm.