
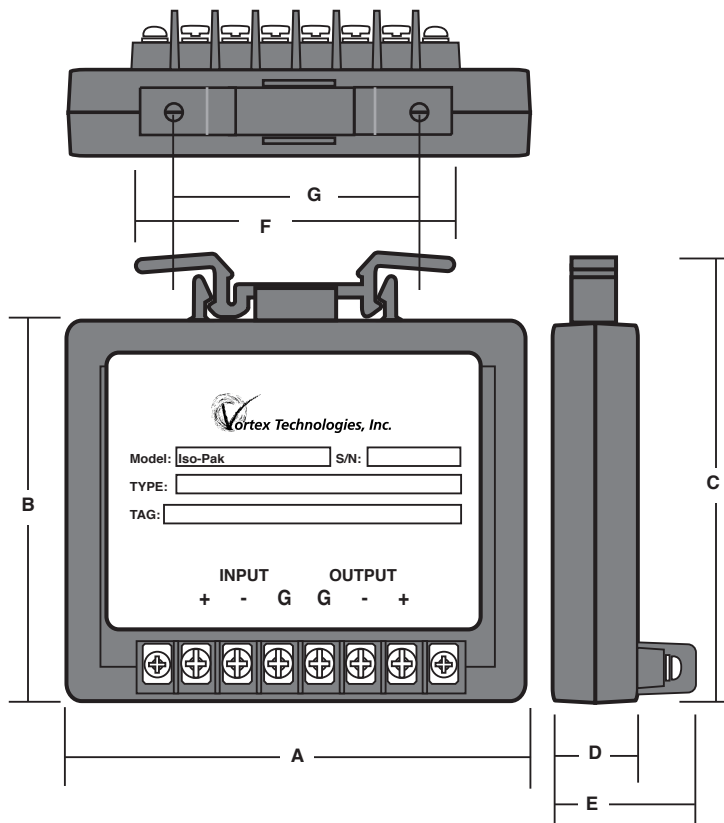


Iso-Pak

4-20 ma Control Loop Isolator, Surge Suppressor, EMI/RFI Filter Din Rail Package

- Modular design allows user to select desired features to best address the application
- Convenient DIN Rail mount package, bracket supplied
- Galvanometric based current loop isolation provides 1500 VRMS of instantaneous isolation
- 10-35 V.D.C. loop powered
- Accuracy to within +/- 0.1 % of input to output signal
- Linearity is better then 0.01%
- No calibration is required.
- Multistage surge suppression to 20,000 amps when added to basic isolation package
- EMIRFI Filtering from 0.1 Hz to 50 MHz when added to basic isolation package

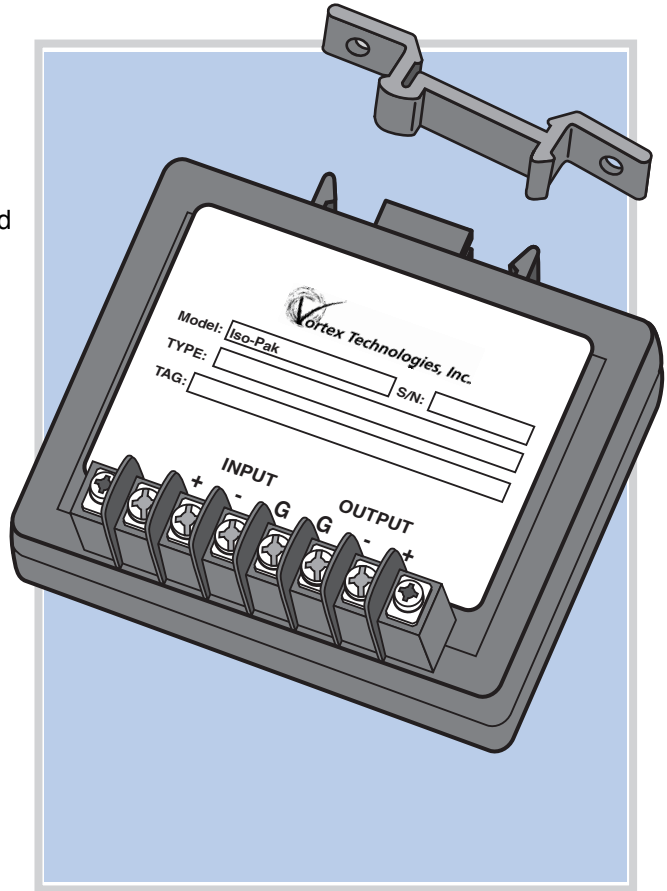

Model #	IP-120-D	IP-230-D	IP-420-D
Length A	4.50 in. 11.43 cm.	4.50 in. 11.43 cm.	4.50 in. 11.43 cm.
Width B	3.50 in. 8.89 cm.	3.50 in. 8.89 cm.	3.50 in. 8.89 cm.
Over-all Width C	4.10 in. 10.41 cm.	4.10 in. 10.41 cm.	4.10 in. 10.41 cm.
Inside Depth D	1.25 in. 3.175 cm.	1.25 in. 3.175 cm.	1.25 in. 3.175 cm.
Depth E	1.9375 in. 4.921 cm.	1.9375 in. 4.921 cm.	1.9375 in. 4.921 cm.
Mtg. Flange Length F	3.125 in. 7.937 cm.	3.125 in. 7.937 cm.	3.125 in. 7.937 cm.
Mtg. Flange Holes G	2.531 in. 6.428 cm.	2.531 in. 6.428 cm.	2.531 in. 6.428 cm.