
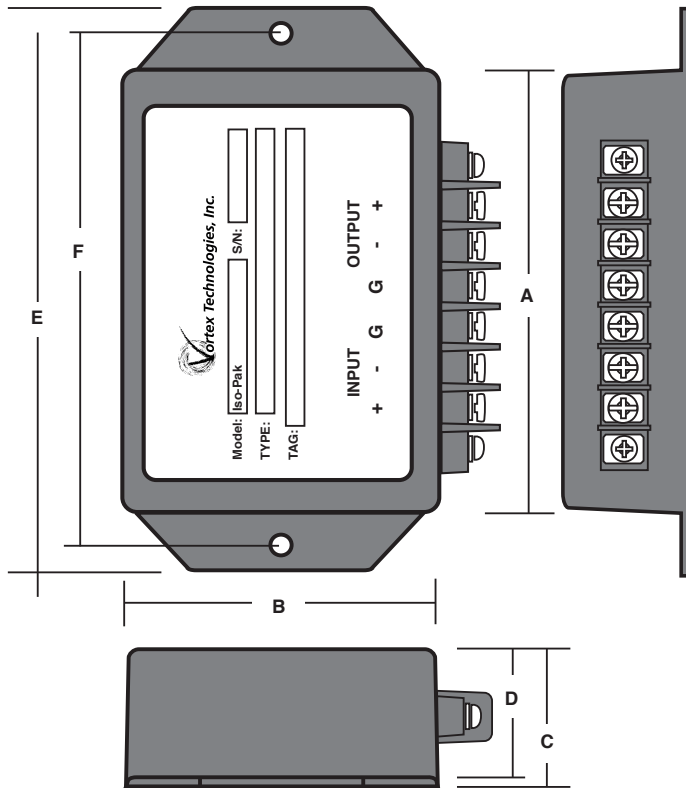


Iso-Pak

4-20 ma Control Loop Isolator, Surge Suppressor, EMI/RFI Filter

- Modular design allows user to select desired features to best address the application
- Galvanometric based current loop isolation provides 1500 VRMS of instantaneous isolation
- 10-35 V.D.C. loop powered
- Accuracy to within +/- 0.1 % of input to output signal
- Linearity is better then 0.01%
- No calibration is required.
- Multistage surge suppression to 20,000 amps when added to basic isolation package
- EMIRFI Filtering from 0.1 Hz to 50 MHz when added to basic isolation package

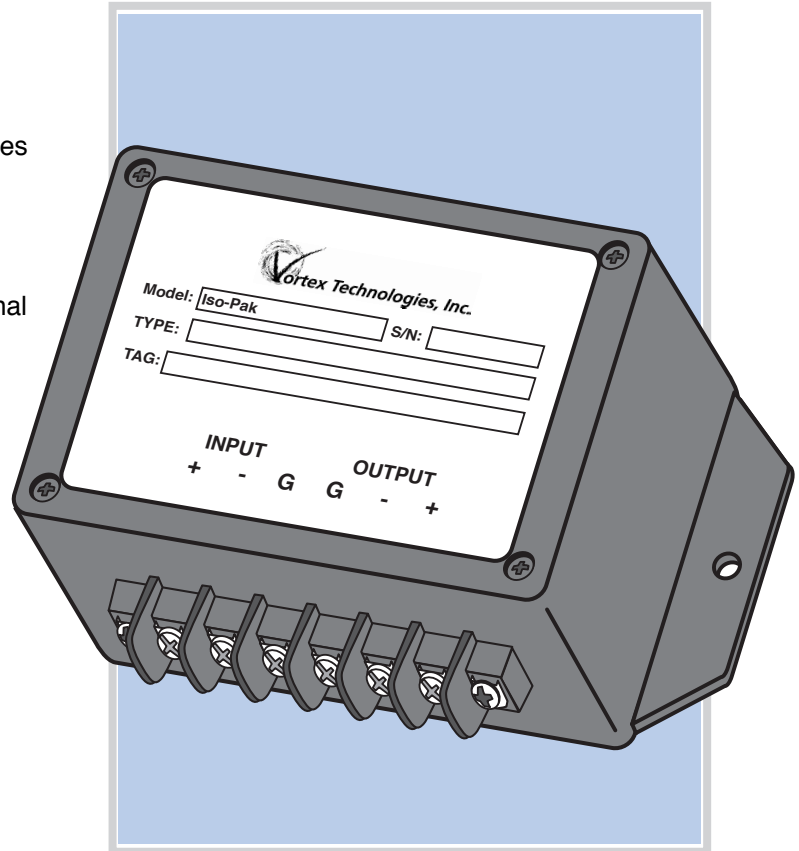

Model #	IP-120	IP-230	IP-420
Length A	4.25 in. 10.795 cm.	4.25 in. 10.795 cm.	4.25 in. 10.795 cm.
Width B	3.0625 in. 7.778 cm.	3.0625 in. 7.778 cm.	3.0625 in. 7.778 cm.
Height C	1.4375 in. 3.651 cm.	1.4375 in. 3.651 cm.	1.4375 in. 3.651 cm.
Inside Depth D	1.3125 in. 3.333 cm.	1.3125 in. 3.333 cm.	1.3125 in. 3.333 cm.
Mtg. Flange Length E	5.25 in. 13.335 cm.	5.25 in. 13.335 cm.	5.25 in. 13.335 cm.
Mtg. Flange Holes F	4.75 in. 12.065 cm.	4.75 in. 12.065 cm.	4.75 in. 12.065 cm.